

## Narrow Trim




The trim of LINNOU is the 5mm. It is combined with the reflector and keep the ceiling exquisite.



The special springs make the extreme narrow trim possible. The thickness range of ceiling is allowed between 8-20mm.

## Deep Anti-glare


Shielding angle is 35°. Minimum UGR is 6.

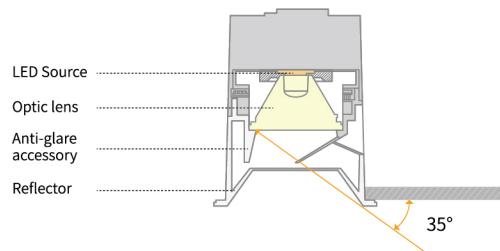

## Specification

Type	Recessed Adjustable Downlight
Power	3W 5W 7W 10W
IP Rating	IP 20
Dimming type	0/1-1/10V / Triac DIM / DALI DIM
Color temperature	2700 K 3000K 4000K
CRI	90
Beam Angle	11° 15° 25° 30° 36° 55°

Visual Feast, Dongguan, China  
Photo © VISUAL FEAST

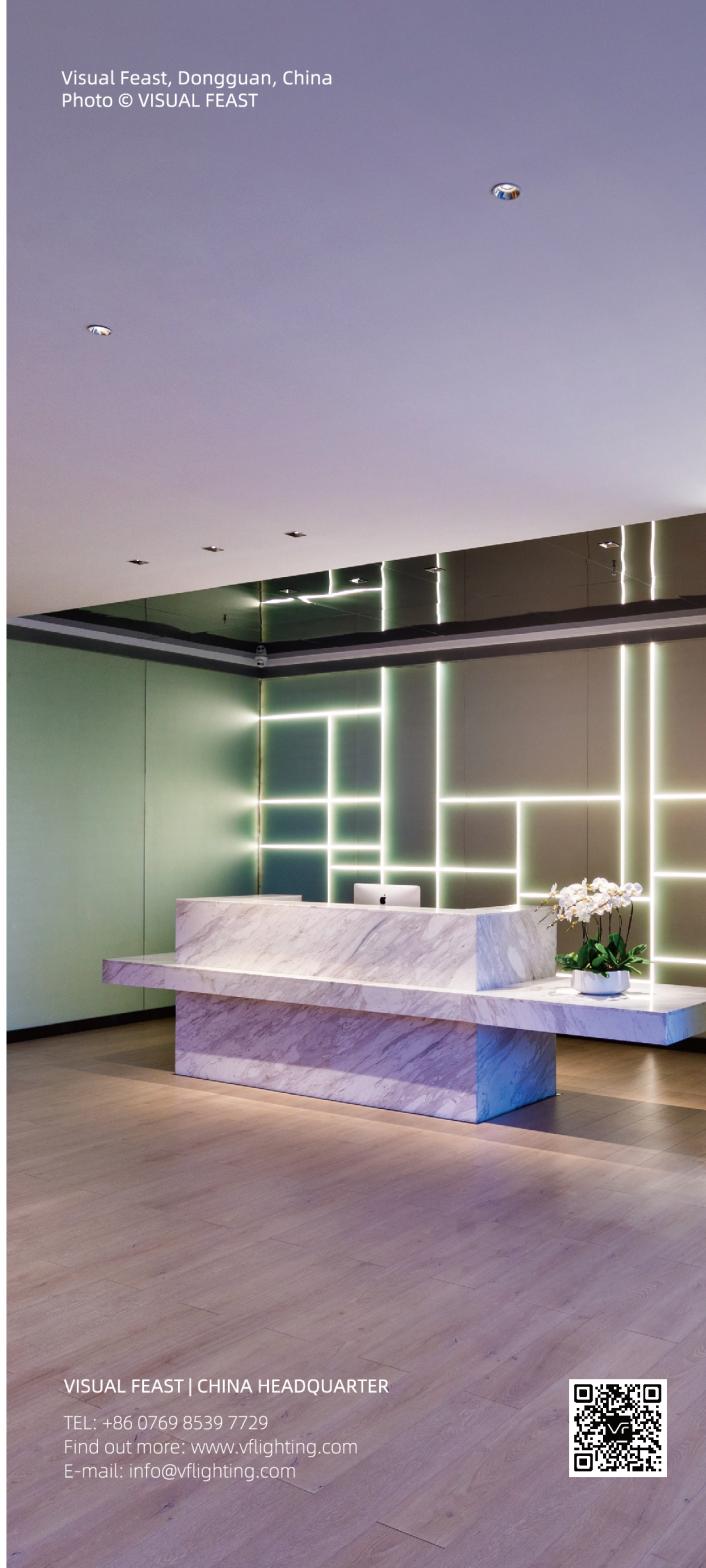

VISUAL FEAST | CHINA HEADQUARTER

TEL: +86 0769 8539 7729

Find out more: [www.vflighting.com](http://www.vflighting.com)  
E-mail: [info@vflighting.com](mailto:info@vflighting.com)



VF VISUAL  
FEAST

**LINNOU**  
Small & delicate  
great practicality

玲珑



## Mini Linnou

Mini LINNOU series are created for the trend of micro-scale luminaires. The minimum size of LINNOU is LN25 with cut-out 25mm. The adjustable LN 35 is a particular design for using in the cabinet.



## Standard Linnou

New trimless LINNOU has the same size as the narrow trim series. The new edition keeps the vertical 30 degrees adjustable, and add a new function of horizontal rotation. After installation, adjust the fixture without taking it off.



LINNOU is named for its compact shape, which saves the hole opening size when installing, effectively solves the problem that the big hole opening on the ceiling may destroy outline integrity of the space. Designers can choose different reflectors according to the comprehensive color of ceiling and space, to present both practicability and beauty. The minimum diameter of cut-out is 25 mm. It matched the latest trend of lighting design requests.



Visual Feast, Dongguan, China  
Photo © VISUAL FEAST