

微光

# GLEAM

Gleams of light at night

VF VISUAL  
FEAST

Five types of caps make creative light shape and uniform light effect on the steps or aisles. The installation is available in the indoor and outdoor.

Arraying in the space regards as a guideline.  
Special oval and square light shape sculpt the symbolic of the architectural construction and emphases an interesting atmosphere.



VISUAL FEAST | CHINA HEADQUARTER


TEL: +86 0769 8539 7729

Find out more: [www.vflighting.com](http://www.vflighting.com)

E-mail: [info@vflighting.com](mailto:info@vflighting.com)

# Characteristics


- 1. Special integral optic design
- 2. Quality anti-corrosion die casting aluminum, and aviation aluminum production
- 3. Electrostatic spraying, suitable for outdoor environment, and indoor waterproof application

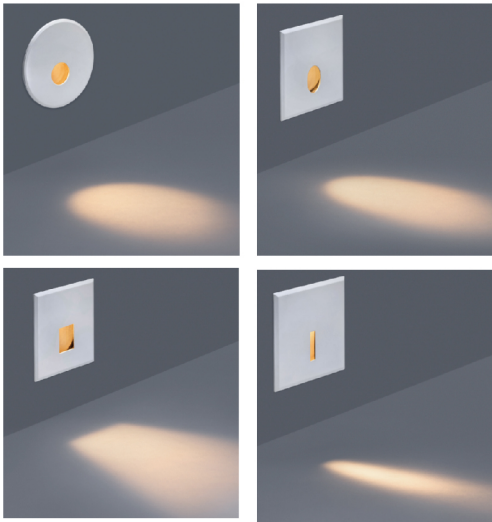

GLEAM Standard

# Size

- 1. Small and elegant , hidden light point, integrated with building
- 2. Integrated low voltage photovoltaic modules supplied power easily. It is safty for using in wet areas.

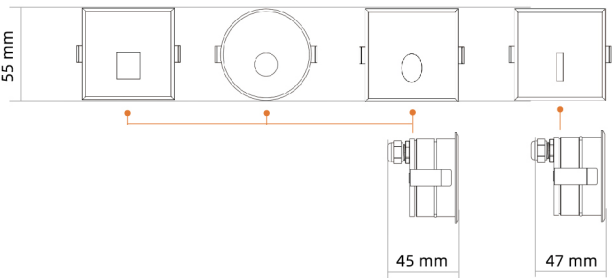


# GLEAM MAX

GLEAM is divided into induction version, and non-inductive version:

The one with induction is used for intelligent indoor lighting. When the person steps into the inducting area, the light will automatically light up. After 30-60s, the light will be automatically extinguished. The product is compatible with the photosensitive switch. When the ambient lighting illuminance is higher than 5-7LUX, GLEAM will not switch on, effectively saving power waste ;

Non-inductive models, IP65 rated for outdoor use; the maximum power can be 6W for the whole light, used in corners, steps, outdoor aisles.

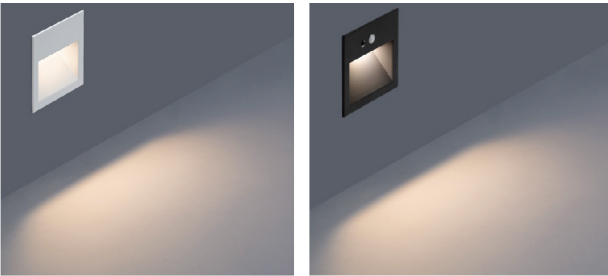


Standard Version

Induction Version

# Inductor Version

Infrared sensing, fan-shaped sensing area, sensing angle 120° sensing distance 1-5 m  
Induction delay, after sensing the person, the lighting time is 30-60 s, (Time can be customized) will automatically go out after  
Self-developed induction module, customized and convenient

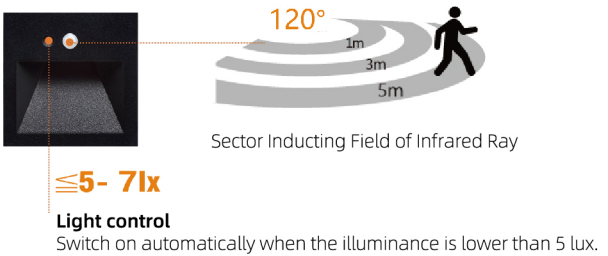

# Specification

Type	Recessed Step Light		
Power	1 W	2 W	6 W
IP Rating	IP 54	IP 65	IP 68
Color temperature	2700 K	3000 K	4000 K