


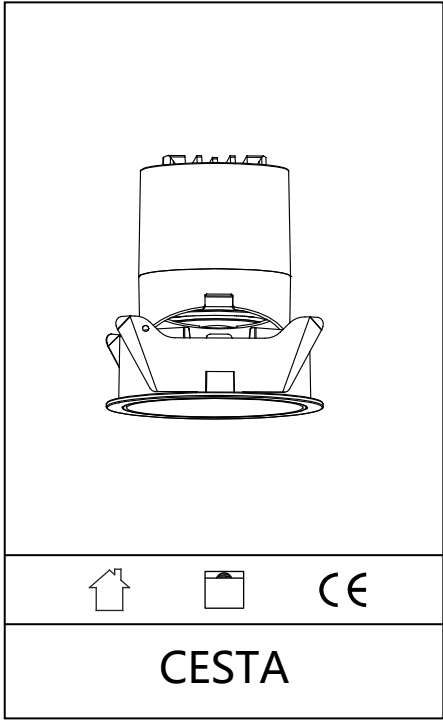

CESTA

Cesta series installation instructions

Series	Cut-out	Series	Cut-out
DR01301	Ø65mm	DR01303	Ø65mm
DR01302	Ø65mm	DR01304	Ø65mm
DR01305	Ø80mm	DR01307	Ø80mm
DR01306	Ø80mm	DR01308	Ø80mm

Installation Instructions (Narrow trim mounted with clips):

1.1

Check the cutting size of the product, cut a hole in the ceiling.
(Applicable ceiling thickness 4-20mm)

1.2

Connect with mains supply with power off (Please choose a matched constant currentdriver for the luminaire firstly if there is nodriver included.)

1.3

Tidy the wires and insert the driver into the ceiling.

1.4

Press the clips of both sides, push the luminaire into the ceiling.

Installation Instructions (mounted with pre-installation kit)

2.1

Check the cutting size of the product, cut a hole in the ceiling.
(Applicable ceiling thickness 4-20mm)

2.2

Pre-installation kit can be installed in the ceiling in advance

2.3

Connect with mains supply with power off (Please choose a matched constant currentdriver for the luminaire firstly if there is nodriver included.)


2.4

Tidy the wires and insert the driver into the ceiling, then push the reflector into the mounting ring and snap the light up into the pre-installation kit.


Installation Instructions (suitable for installation with trimless embedded parts)

The pre-embedded parts need to be installed before plastering.


- 3.1** Check the cutting size of the product, cut a hole in the ceiling.
(Applicable ceiling thickness 2-20mm)




- 3.2** First, rotate counterclockwise to loosen the screws from the handle. Then open the handle and hang it onto the ceiling. Finally, tighten the screws securely.




- 3.3** Plaster the trimless adapter and the thickness is about 3mm. Don't remove the cover before finishing plaster.




- 3.4** After plastering, immediately remove the plastering protection cover and clean the inner surface thoroughly.



- 3.5** In the event of power outage, connect the driver to the mains electricity (If there is no driver, please choose a matched constant current driver for the luminaire firstly)



- 3.6** Tidy the wires and insert the driver into the ceiling, then push the reflector into the mounting ring and snap the light up into the pre-installation kit.



4.



This product is only suitable for indoor, it is not allowed to be rinsed with water.



Independent external driver, recessed mounted.

Do not clean LED chip and reflector with hand or towel !



- Use only drivers that comply with IEC or CE safety standards.
- Check if the power supply match with the luminaire.
- Must consider the maximum current value displayed on the label of the luminaire.
- The voltage displayed on the luminaire is not used to select the constant voltage driver, but the voltage covered by the selected constant current driver.
- Take suitable ESD measures to avoid touching bare conductors.
- LED chips can be damaged if be in touch with chemical material or gas. Therefore, it is not allowed to clean the LED housing or luminaire by chemicals.
- The following items are confirmed to have negative impact on the performance of the luminaire, avoid to keep luminaire in the same circumstance with them.
 - Methyl acetate or ethyl acetate (i.e., nail polish remover)
 - Cyanoacrylates (i.e., "Superglue")
 - Glycol ethers (including Radio Shack @ Precision Electronics)
 - Cleaner - dipropylene glycol monomethyl ether
 - Formaldehyde or butadiene (including Ashland PLIOBOND @ adhesive)
 - Dymax 984-LVUF conformal coating
 - Loctite Sumo Glue, Loctite 384 adhesive, Loctite 7387 activator
 - Gorilla Glue, Bleach, Bleach-containing cleaners, sprays
- Remove the insulation material from the luminaire or provide enough space so that the temperature raising will not overpass the limited TC.
- LED chip is very sensitive to switching transients, therefore, LED lamps and appliances must be connected after power cut off, no hotswappable.
- Recommends using the driver indicated on the luminaire manual.
- Must consider the polarity of the product.
- It is recommended to use an ambient temperature of -10 °C to 40 °C for indoor lighting equipment
- If the external flexible cable or cord of this lamp is damaged, the cord should be replaced by the manufacturer or its service agent or a similarly qualified person
- The light source in this lamp should be replaced by the manufacturer or its service agent or a similarly qualified person

5.

6.