

FOLLO




Follo series installation instructions

1.



SERIES	
TT00103	TT00102

Notice:

- 1 All operation must be in de-energized!
- 2 Ensure the handle is in closed position before assemble the adapter to the track.
- 3 Put the handle to the point position after assemble the adapter to the track.
- 4 Keep the power off and ensure the handle is in closed position.
- 5 Shall use the track suitable for the lamp, and pay attention to the installation direction of the third-line track, that is, the one side of the light fixture has two copper plates should be fitted on the same side of the third-line track groove with two copper wires.

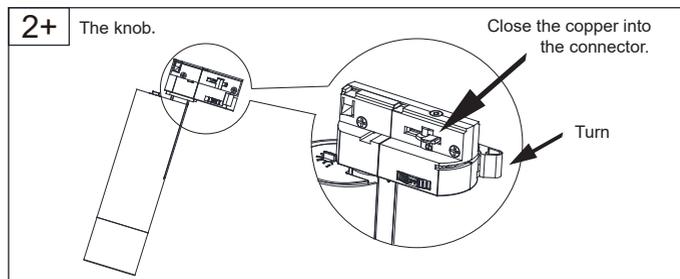


2.





The specific appearance is subject to the real product !

4- wire connection instructions

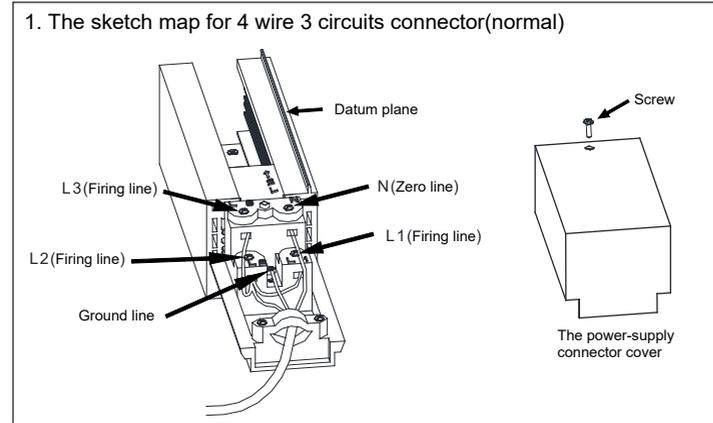


3.

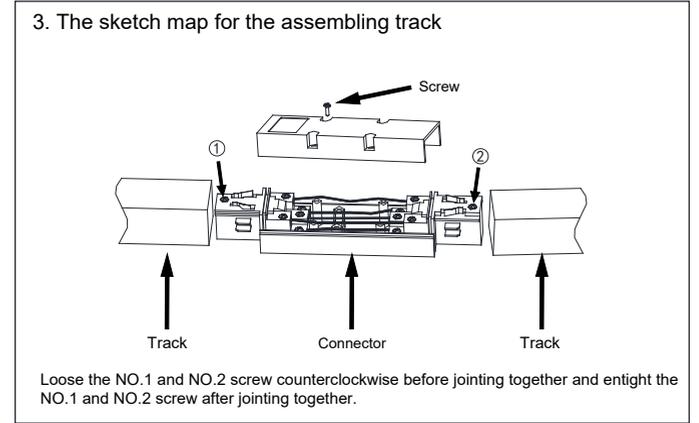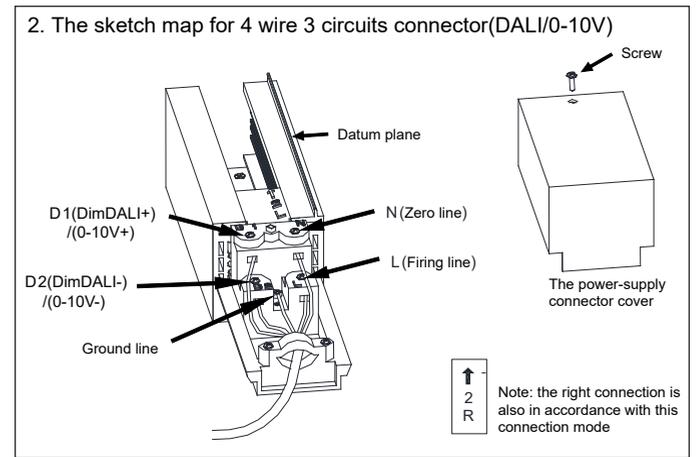



4.

4. The sketch map for connection adapter and track

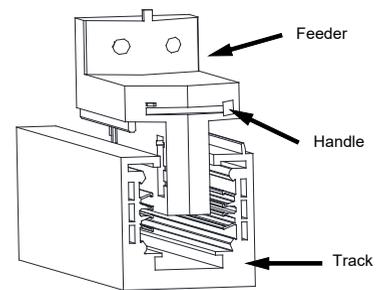

The specific appearance is subject to the real product !

6-wire wiring diagram:

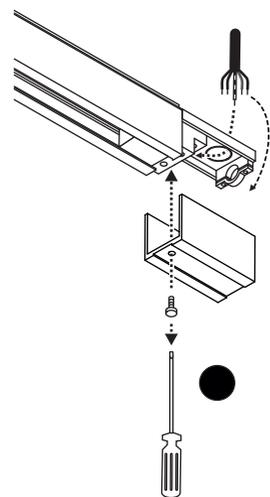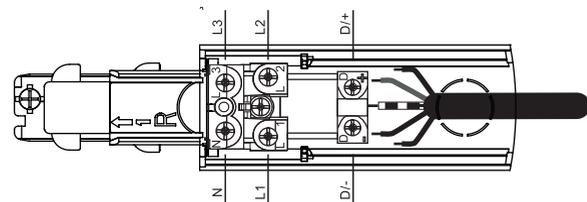


Optical Accessories Change:

Options: Linear lens, Honeycomb, Cross Louver


1、 Linear Lens Change

1. Cut power off;
2. Take off c/b, put in a and then fix b/c successively




2、 Cross Louver Change

1. Cut power off;
2. Take off c, change cross louver and then fix.



3、 Honeycomb Change

1. Cut power off;
2. Take off c, change honeycomb and then fix.



Do not clean LED chip and reflector with hand or towel !



- Use only drivers that comply with IEC or CE safety standards.
- Check if the power supply match with the luminaire.
- Must consider the maximum current value displayed on the label of the luminaire.
- The voltage displayed on the luminaire is not used to select the constant voltage driver, but the voltage covered by the selected constant current driver.
- Take suitable ESD measures to avoid touching bare conductors.
- LED chips can be damaged if be in touch with chemical material or gas. Therefore, it is not allowed to clean the LED housing or luminaire by chemicals.
- The following items are confirmed to have negative impact on the performance of the luminaire, avoid to keep luminaire in the same circumstance with them.
 - Methyl acetate or ethyl acetate (i.e., nail polish remover)
 - Cyanoacrylates (i.e., "Superglue")
 - Glycol ethers (including Radio Shack ® Precision Electronics Cleaner - dipropylene glycol monomethyl ether)
 - Formaldehyde or butadiene (including Ashland PLIOBOND ® adhesive)
 - Dymax 984-LVUF conformal coating
 - Loctite Sumo Glue、 Loctite 384 adhesive、 Loctite 7387 activator
 - Gorilla Glue、 Bleach, Bleach-containing cleaners, sprays
- Remove the insulation material from the luminaire or provide enough space so that the temperature raising will not overpass the limited TC.
- LED chip is very sensitive to switching transients, therefore, LED lamps and appliances must be connected after power cut off, no hotswappable.
- Recommends using the driver indicated on the luminaire manual.
- Must consider the polarity of the product.
- If the external flexible cable or cord of this lamp is damaged, the cord should be replaced by the manufacturer or its service agent or a similarly qualified person
- The light source in this lamp should be replaced by the manufacturer or its service agent or a similarly qualified person