


BOX adjustable installation instructions


SERIES	
DS01001	DS01002

Installation Instructions I (surface mounted) :


- 1.1 Cut a hole (around $\phi 30\text{mm}$) in the ceiling.




- 1.2 Power on to check whether it works.




- 1.3 Connect the luminaire with the power cable under power off condition.




- 1.4 Fix the mounting bracket in the ceiling by screws.



- 1.5 Push the light up with stickpoint to stickpoint.




- 1.6 Set the screws in both sides.




Installation Instructions II (hanging wire) :

- 2.1 Take out the mounting bracket through loosening the screws.



- 2.2 Cut a hole on the ceiling to wires, and fix the mounting bracket next to the hole by screws.




1.


2.

3.


2.3 Connect the luminaire and the input power supply cable together under the condition power off.




2.4 Connect the wires.




2.5 Fix the ceiling plate to the installation bracket with screws.




2.6 Installation finish.



4.

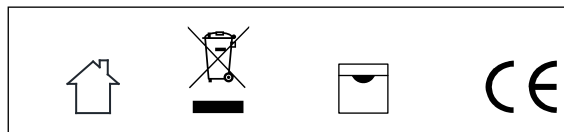

 This product is only suitable for indoor, it is not allowed to be rinsed with water.

 LED driver is built in, Open Installation.

5.

Do not clean LED chip and reflector with hand or towel !



- Use only drivers that comply with IEC or CE safety standards.
- Check if the power supply match with the luminaire.
- Must consider the maximum current value displayed on the label of the luminaire.
- The voltage displayed on the luminaire is not used to select the constant voltage driver, but the voltage covered by the selected constant current driver.
- Take suitable ESD measures to avoid touching bare conductors.
- LED chips can be damaged if be in touch with chemical material or gas. Therefore, it is not allowed to clean the LED housing or luminaire by chemicals.
- The following items are confirmed to have negative impact on the performance of the luminaire, avoid to keep luminaire in the same circumstance with them.
 - Methyl acetate or ethyl acetate (i.e., nail polish remover)
 - Cyanoacrylates (i.e., "Superglue")
 - Glycol ethers (including Radio Shack ® Precision Electronics)
 - Cleaner - dipropylene glycol monomethyl ether
 - Formaldehyde or butadiene (including Ashland PLIOBOND ® adhesive)
 - Dymax 984-LVUF conformal coating
 - Loctite Sumo Glue, Loctite 384 adhesive, Loctite 7387 activator
 - Gorilla Glue, Bleach, Bleach-containing cleaners, sprays

- Remove the insulation material from the luminaire or provide enough space so that the temperature raising will not overpass the limited TC.
- LED chip is very sensitive to switching transients, therefore, LED lamps and appliances must be connected after power cut off, no hotswappable.
- Recommends using the driver indicated on the luminaire manual.
- Must consider the polarity of the product.
- If the external flexible cable or cord of this lamp is damaged, the cord should be replaced by the manufacturer or its service agent or a similarly qualified person
- The light source in this lamp should be replaced by the manufacturer or its service agent or a similarly qualified person

6.