


FOLLO


Follo series installation instructions

SERIES	CUT-OUT
TR00102	Ø70mm


**1** Check the cutting size of the product, cut a hole in the ceiling which should be suitable for a thickness of 8-25mm, lead out the power cord.




**2** Open the back cover of the luminaire, lead the electricity power supply cable through the back cover.




**3** Connect the electricity power supply cable to the terminal block in the luminaire under the condition power off.




**4** Fix the back cover.



**5** Press the clips on both sides, insert the luminaire into the ceiling.



**6** Installation finished.



The specific appearance is subject to the real product !

1.


2.

3.

## Optical Accessories Change:


Options: Linear lens, Honeycomb, Cross Louver

**1、 Linear Lens Change**




1. Cut power off;  
2. Take off c/b, put in a and then fix b/c successively

**2、 Cross Louver Change**



1. Cut power off;  
2. Take off c, change cross louver and then fix.


**3、 Honeycomb Change**



1. Cut power off;  
2. Take off c, change honeycomb and then fix.

The specific appearance is subject to the real product !

4.

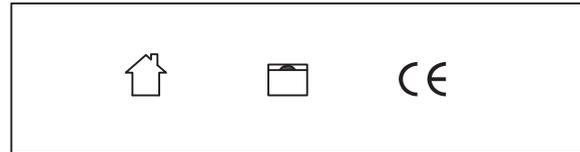

This product is only suitable for indoor.  
It is not allowed to be rinsed with water.



LED driver is built in, recessed mounted.

5.

Do not clean LED chip and reflector with hand or towel !



- Use only drivers that comply with IEC or CE safety standards.
- Check if the power supply match with the luminaire.
- Must consider the maximum current value displayed on the label of the luminaire.
- The voltage displayed on the luminaire is not used to select the constant voltage driver, but the voltage covered by the selected constant current driver.
- Take suitable ESD measures to avoid touching bare conductors.
- LED chips can be damaged if be in touch with chemical material or gas. Therefore, it is not allowed to clean the LED housing or luminaire by chemicals.
- The following items are confirmed to have negative impact on the performance of the luminaire, avoid to keep luminaire in the same circumstance with them.
  - Methyl acetate or ethyl acetate (i.e., nail polish remover)
  - Cyanoacrylates (i.e., "Superglue")
  - Glycol ethers (including Radio Shack ® Precision Electronics Cleaner - dipropylene glycol monomethyl ether)
  - Formaldehyde or butadiene (including Ashland PLIOBOND ® adhesive)
  - Dymax 984-LVUF conformal coating
  - Loctite Sumo Glue. Loctite 384 adhesive. Loctite 7387 activator
  - Gorilla Glue. Bleach, Bleach-containing cleaners, sprays

- Remove the insulation material from the luminaire or provide enough space so that the temperature raising will not overpass the limited TC.
- LED chip is very sensitive to switching transients, therefore, LED lamps and appliances must be connected after power cut off, no hotswappable.
- Recommends using the driver indicated on the luminaire manual.
- Must consider the polarity of the product.
- If the external flexible cable or cord of this lamp is damaged, the cord should be replaced by the manufacturer or its service agent or a similarly qualified person
- The light source in this lamp should be replaced by the manufacturer or its service agent or a similarly qualified person

6.